



Create a better life through our work



Innovation Integrity Service

Selection Guide for Control Products



To be the most valuable industrial automation core components and solution provider



R&D centers

4

Set up nationally

Sales Offices

40+

Sales elites gathering

Global Distributors


400+

Products sold worldwide

The products are widely used in OEM fields such as photovoltaic, 3C, lithium batteries, robots, packaging, textiles, logistics, lasers, machine tool, etc.




CONTROL SYSTEM TOPOLOGY

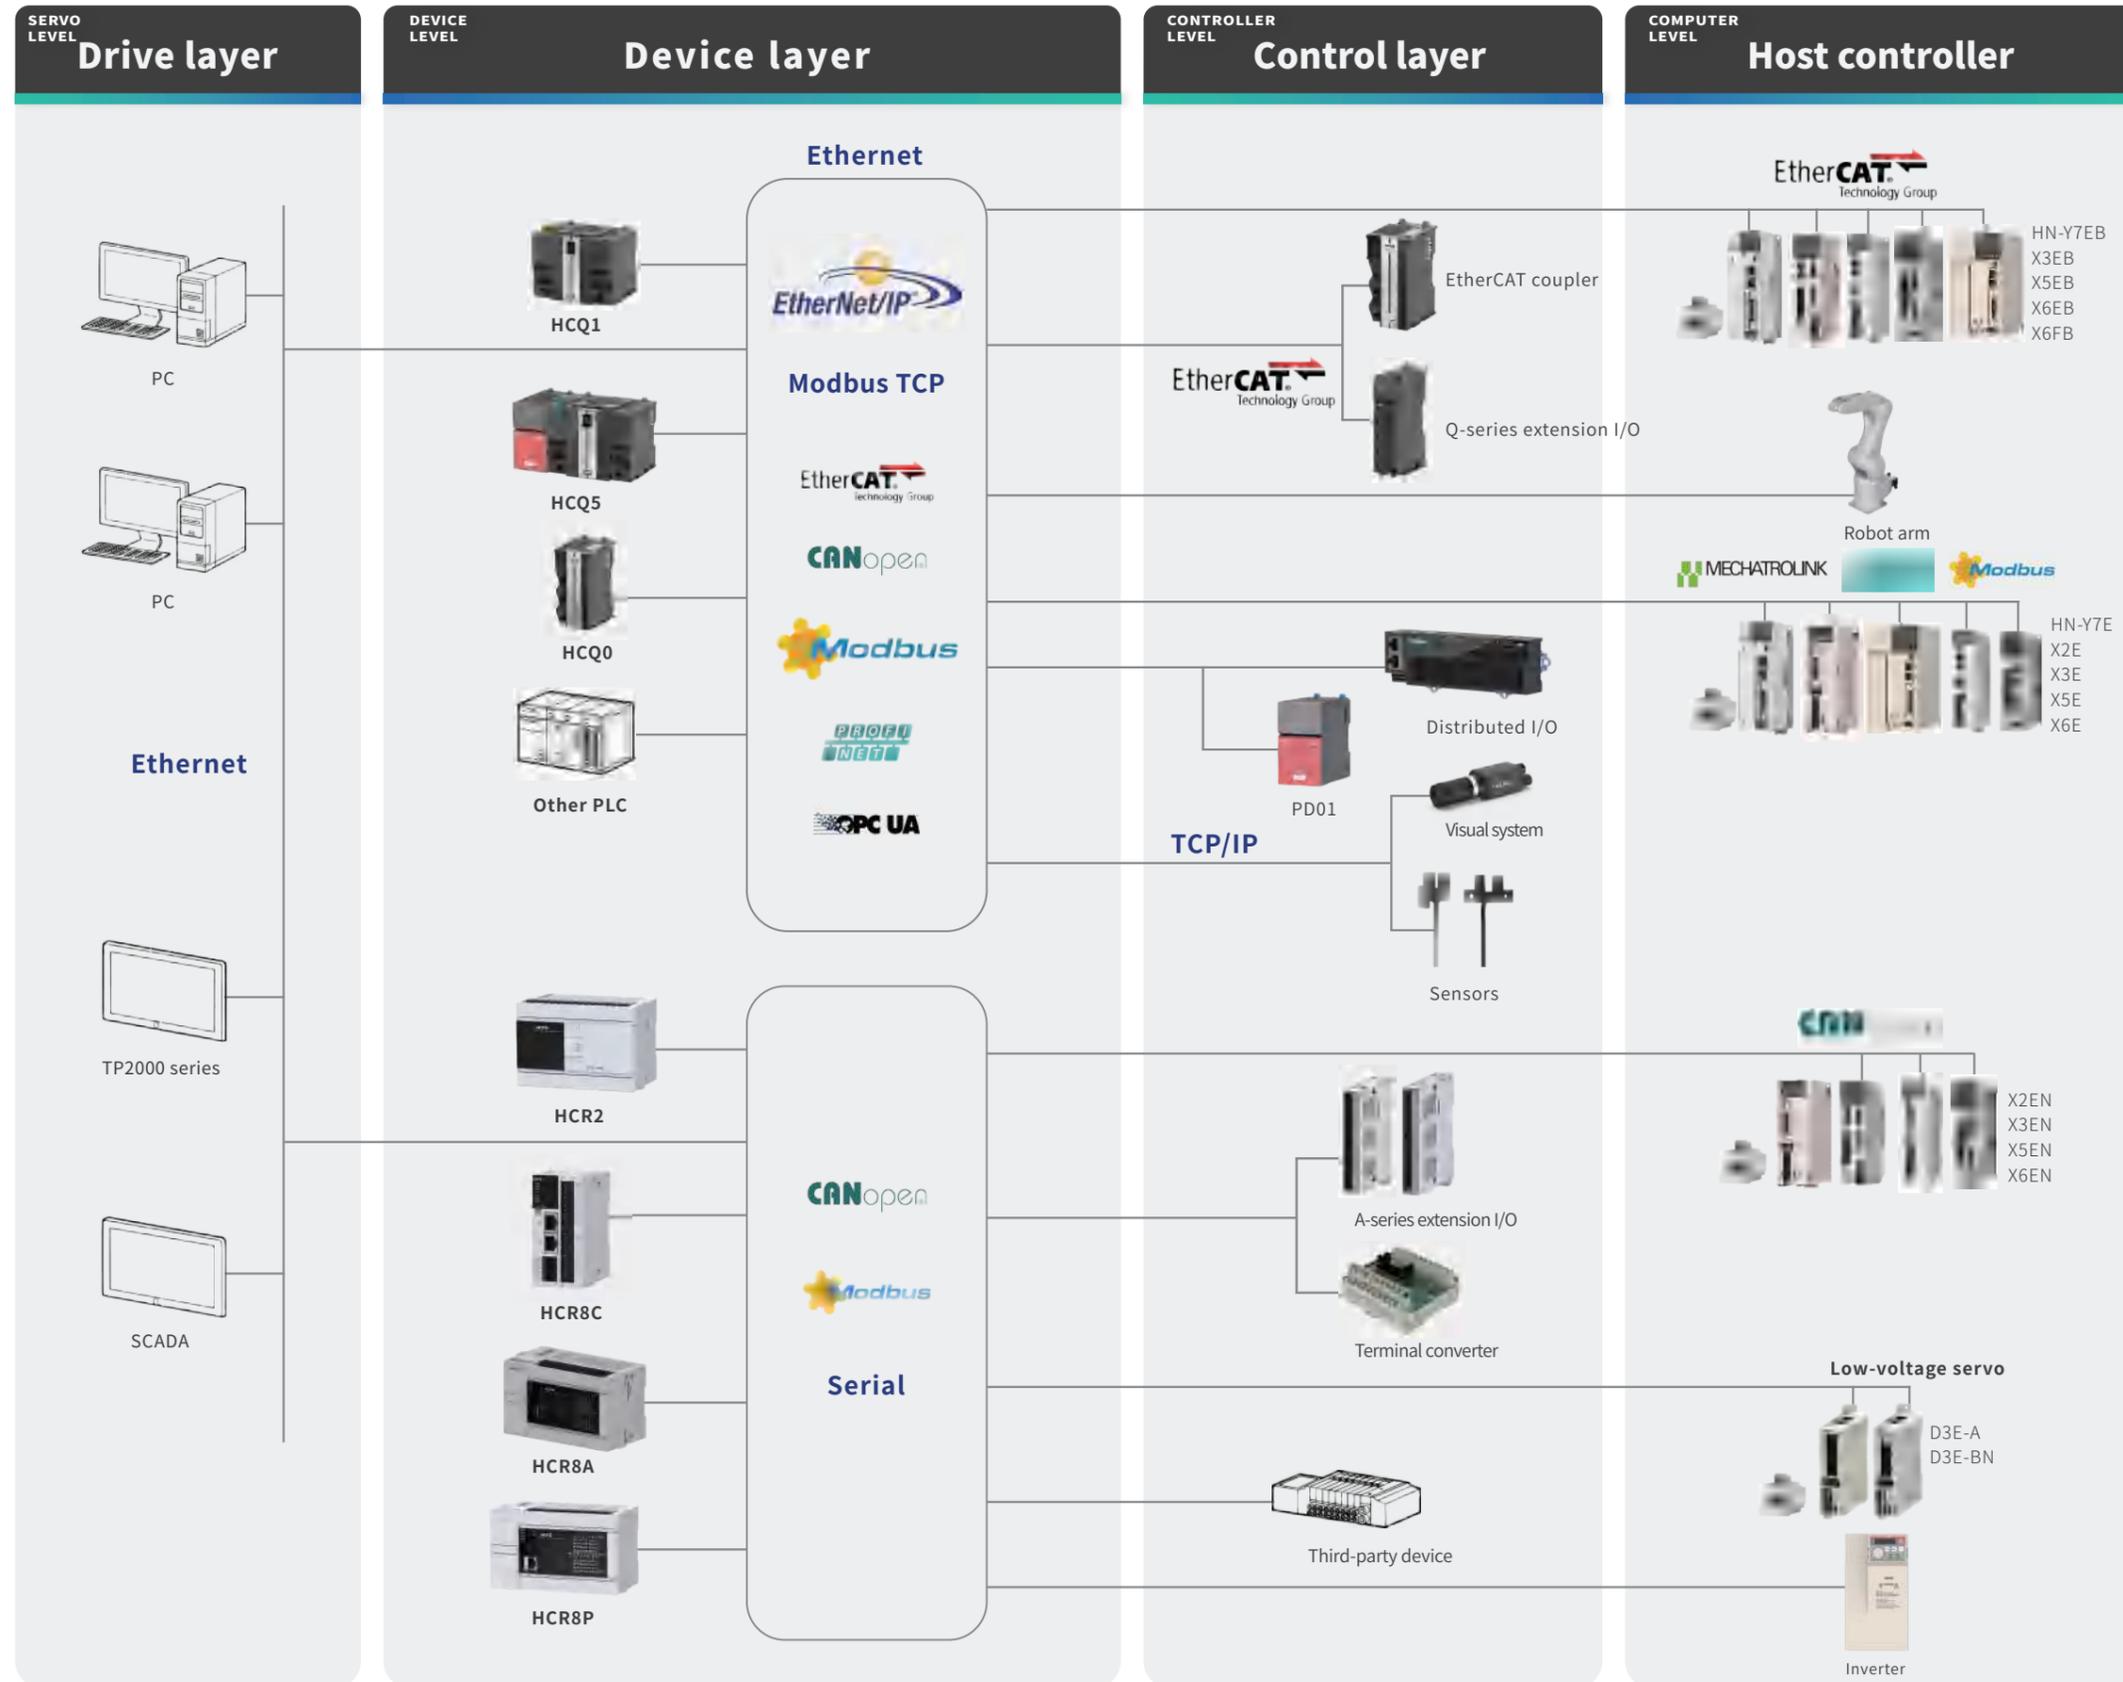

COMPUTER LEVEL

Ethernet cable / USB to achieve program download


The upper controller transmits the internal data of the program through the Ethernet cable, and the user can also upload and download the program through the USB port.

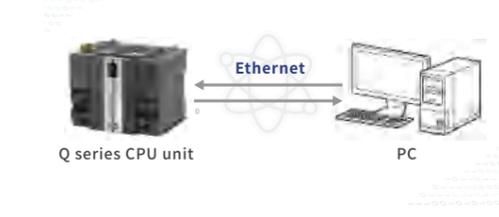

COMPUTER LEVEL

Multiple communication protocol supported:


Various communication protocol: Modbus TCP
Modbus RTU EtherNet/IP OPC UA
EtherCAT CANopen RS232/RS485

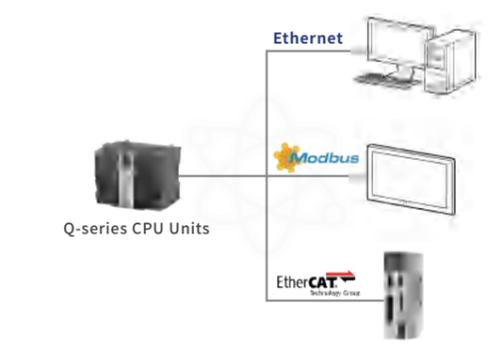

COMPUTER LEVEL

Up to 16 local extension modules

Q series CPU unit supports power modules on the left side, and supports digital, analog, temperature measurement, high-speed counting extension modules, etc. on the right side.

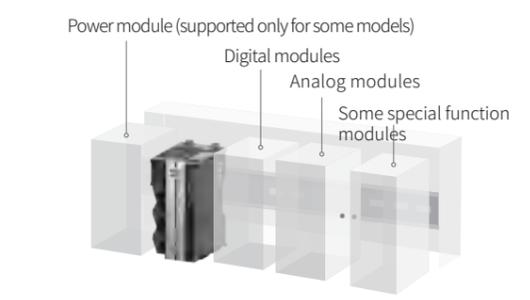

*The number of local extension modules needs to be calculated based on the current consumption of the module

Control topology
Q-series PAC
IQ8000-series IPC
Q-series I/O
Q-series I/O
Distributed I/O
A-series PLC
R-series PLC
A-series I/O
Product list

Control topology
Q-series PAC
IQ8000-series IPC
Q-series I/O
Distributed I/O
A-series PLC
R-series PLC
A-series I/O
Product list

Overall solutions

Q1 standard PACs are the solution to a control device that integrates logical operations, motion control, visualized interfaces, and multiple communications in a single control device.



Up to 128 axes in 4ms

Help improve production accuracy and efficiency

Customer-centric

The brain of the control system, rich communication interfaces make information interaction more easier, software motion control enrich the hardware options, and graphical data collection makes the variable monitoring more intuitive.



Q-SERIES LINEUP

Naming rule for Q-series PACs

HCQ1□-1300-D2

Product name HC HC: HCFA controller	Series name Q1 Q0: Basic bus motion controller Q1: Standard bus motion controller Q3: High-end bus motion controller Q5: Basic intelligent mechanical controller Q7: Standard intelligent mechanical controller Q9: High-end intelligent mechanical controller	Series models □ N/A: Standard type S: Basic type J: Modular type	Operating system 1 1: Linux 2: Windows10 3: Windows7 4: QNX
Number of motion control axis 3 n (0~8): 2 ⁿ⁺² <small>Note: Number of axes recommended by the controller.</small>	Control software module 0 0: CODESYS 1: HCPACS 2: ROBOT 3: CNC 4: MC 9: N/A	Additional function software module 0 0: Standard software 1: Machine vision 2: Edge computing	Power type D D: DC power A: AC power

Product iteration serial number

2

Recommended number of axes

Series name	Classification	Recommended number of axes	Max. number of axes
HCQ0S*	1200	CANOpen: 16 axes	Unlimited
HCQ0	1100	EtherCAT: 8 axes	Up to 8 axes
	1200	EtherCAT: 16 axes	Unlimited
HCQ1	1200	EtherCAT: 16 axes	Up to 16 axes
	1300	EtherCAT: 32 axes	Unlimited
HCQ5	1400	EtherCAT: 64 axes	Up to 64 axes
	1500	EtherCAT: 128 axes	Unlimited
HCQ7*	1500	EtherCAT: 128 axes	Up to 128 axes
	1600	EtherCAT: 256 axes	Unlimited
HCQ9*	1600	EtherCAT: 256 axes	Up to 256 axes
	1700	EtherCAT: 256*2 axes	Unlimited

* Under development

HCQ0-1□00-D

Basic bus motion controller



Basic performance	Program capacity 16MB	Recommend number of axes: 16 ^{*1}
	Output power 16W	16 local extension modules supported
Functions	Number of IO points for main unit	Single-axis positioning and fixed-speed
	Electric cam/flying shear/rotary shear	Electronic gear
	CNC G-code control/Robot control	
	Linear interpolation/circular interpolation/helical interpolation	
Supported protocol	EtherCAT	CANOpen
	Modbus RTU	Modbus TCP

HCQ1-1□00-D2

Standard bus motion controller



Basic performance	Program capacity 16MB	Recommend number of axes: 32 ^{*1}
	Output power 16W	16 local extension modules supported
Functions	Number of IO points for main unit	Single-axis positioning and fixed-speed
	High-speed pulse input/output	Electric cam/flying shear/rotary shear
		Electronic gear
	CNC G-code control/Robot control	
	Linear interpolation/circular interpolation/helical interpolation	
Supported protocol	EtherCAT	CANOpen
	EtherNet / IP	Modbus TCP
		OPC/UA
		Modbus RTU

HCQ5-1□00-A

Basic intelligent mechanical controller



Basic performance	Program capacity 16MB	Recommend number of axes: 128 ^{*1}
	Output power 16W	16 local extension modules supported
Functions	Single-axis positioning and fixed-speed	Electronic gear
	Linear interpolation/circular interpolation/helical interpolation	Electric cam/flying shear/rotary shear
		CNC G-code control/Robot control
Supported protocol	EtherCAT	CANOpen ^{*2}
	EtherNet / IP	Modbus TCP
		OPC/UA
		Modbus RTU

*1 Recommended axis number for high-configuration models 4ms. For specific models, please refer to product naming rules.

*2 Will be supported.



> Electrical specifications

Items	Technical specifications			
Dielectric withstand voltage	AC1000V for 1 min, between power terminal and I/O terminal, between external terminal and shell			
Noise resistance	1500Vp-p or more, Noise width 1μs, 50ns (based on noise simulator), comply with (IEC61000-4-2/3/4/6)			
Vibration resistance	Installation	Frequency (Hz)	Acceleration (m/s²)	Single amplitude (mm)
	DIN rail mounting	10-57	-	0.035
		57-150	4.9	-
	10 times of testing in each direction (X-, Y-, and Z-axis directions) (Total: 80 min, each)			
Insulation resistance	50 MΩ or more using 500 V DC insulation resistance meter (Between all terminals and ground terminal)			
IP protection level	IP20			
Working atmosphere	Max. 50°C, free from excessive dust and corrosive gas			
Working altitude	2000m (80kPa)			
Degree of pollution	2, Normally there is only non-conductive pollution, but temporary conductivity caused by condensation should also be expected			

> Environment specifications

Classifications	Items	Working environment	Transport environment	Storage environment
Environment parameter (IEC60721-3)	Temperature	0~50°C (No freezing)	-40~75°C	-25~75°C
	Humidity	5-95%RH (No condensation)		
	Impact (collision)	Acceleration 150m2, action time 11ms, twice in each direction (X-, Y-, and Z-axis directions)		
	Altitude/Atmosphere	Max.2000m	Max.3000m (>70kPa)	

> Input specifications*

Items	Specifications
Signal name	Transistor input (I0-I2)
Rated input voltage	DC 24V (+20%~-15%, pulse ripple within 10%)
Input type	NPN
Rated input current	3.65mA
ON current	>4.14mA
OFF current	<3.88mA
Input impedance	1.5KΩ
Max. input frequency	1kHz
Common method	Shared with power supply 0V, short-circuited internally

> Output specifications*

Items	Specifications
Signal name	Transistor output (Q0-Q1)
Output polarity	NPN
Control circuit voltage	DC 5~24V
Rated load current	50mA
Max. voltage drop at power-ON	0.05V
Leakage current at power-OFF	<0.1mA
Output frequency	Max. 1kHz
Common method	Shared with power supply 0V, short-circuited internally

*Will be supported.

> Power specifications

Items	Power voltage	Voltage fluctuation range	Input power	Undervoltage level	Output voltage	Voltage fluctuation	Output power
Specifications	DC 24V	-15%~20%	36W	19V	12V	±5%	16W

> Performance specifications

Items	Specifications			
Programming	Program capacity	16MBytes		
	I-area (%I)	128KBytes		
	Q-area (%Q)	128KBytes		
	M-area (%M)	512KBytes		
	Power-failure retention area	800KBytes		
	Other variables	Not defined		
Configuration	Number of extension modules	Digital module	Calculated based on current consumption	
		Analog module		
		External power supply		12V/16W
EtherCAT	Communication standard	IEC 61158 Type12		
	Physical layer	100BASE-TX		
	Transmission speed	100Mbps (100Base-TX)		
	Duplex mode	Full duplex		
	Topology	Linear, bus and star-type		
	Transmission medium	Cat.5E twisted pair cables		
	Maximum transmission distance between nodes	100m		
	Max. process data	Input: 5,736 bytes Output: 5,736 bytes (but the max. number of frames of process data is 4)		
	Communication cycle	Mini.1ms		
	CANOpen master	Link layer	CAN2.0A	
Terminal resistor		Built-in 120Ω. Do not support disconnection		
Support baud rate bps		20K,50K,100K,125K,250K,500K,800K和1M		
Transmission medium		Cat.5E twisted pair cables		
Max. communication distance		2500 m (20Kbit/s)		
Maximum number of the slaves		32		
Communication cycle		Mini.1ms		
Serial ports	Physical layer	COM1	RS485	
		COM2	RS485 only support master station	
		COM3	RS232	
	Terminal resistor	COM1	Built-in 120Ω, support DIP switch	
		COM2	Built-in 120Ω. Do not support disconnection	
	Baud rate bps	4800~115200		
	Max. communication distance	COM1, COM2	500m	
		COM3	15m	
Maximum number of the slaves	COM1, COM2	32		
	COM3	1		
Transmission medium	Cat.5E twisted pair cables			



> Electrical specifications

Items	Technical specifications			
Dielectric withstand voltage	AC1000V for 1 min, between power terminal and I/O terminal, between external terminal and shell			
Noise resistance	1500Vp-p or more, Noise width 1μs, 50ns (based on noise simulator), comply with (IEC61000-4-2/3/4/6)			
Vibration resistance	Installation	Frequency (Hz)	Acceleration (m/s²)	Single amplitude (mm)
	DIN rail mounting	10-57 57-150	- 4.9	0.035 -
10 times of testing in each direction (X-, Y-, and Z-axis directions) (Total: 80 min, each)				
Insulation resistance	50 MΩ or more using 500 V DC insulation resistance meter (Between all terminals and ground terminal)			
IP protection level	IP20			
Working atmosphere	Max. 50°C, free from excessive dust and corrosive gas			
Working altitude	2000m (80kPa)			
Degree of pollution	2, Normally there is only non-conductive pollution, but temporary conductivity caused by condensation should also be expected			

> Environment specifications

Classifications	Items	Working environment	Transport environment	Storage environment
Environment parameter (IEC60721-3)	Temperature	0~50°C (No freezing)	-40~75°C	-25~75°C
	Humidity	5-95%RH (No condensation)		
	Impact (collision)	Acceleration 150m2, action time 11ms, twice in each direction (X-, Y-, and Z-axis directions)		
	Altitude/Atmosphere	Max.2000m	Max.3000m (>70kPa)	

> High-speed input specifications

Items	Specifications
Signal name	High-speed input (DI0-DI15)
Rated input voltage	DC 24V (+20%~-15%, pulse ripple within 10%)
Input type	NPN, PNP
Rated input current	3.65mA
ON current	>4.14mA
OFF current	<3.88mA
Input impedance	1.5KΩ
Max. input frequency	100kHz (Version 2.XX.XX) 200kHz (Version 3.XX.XX or more)
2-phase input worst duty ratio	(40%:60%) ~ (60%:40%)
Common method	Every 8 points share a common terminal.

> High-speed output specifications

Items	Specification
Signal name	Output (DO0-DO15)
Output polarity	NPN
Control circuit voltage	DC 5~24V
Rated load current	250mA
Max. voltage drop at power-ON	0.05V
Leakage current at power-OFF	<0.1mA
Output frequency	100KHz (Version 2.XX.XX) 200KHz (Version 3.XX.XX or more)
Common method	Every 8 points share a common terminal.

> Power specifications

Items	Power voltage	Voltage fluctuation range	Input power	Undervoltage level	Output voltage	Voltage fluctuation	Output power
Specifications	DC 24V	-15%~20%	36W	19V	12V	±5%	16W

> Performance specifications

Items	Specifications			
Programming	Program capacity	16MBytes		
	I-area (%I)	128KBytes		
	Q-area (%Q)	128KBytes		
	M-area (%M)	512KBytes		
	Power-failure retention area	800KBytes		
	Other variables	Not defined		
Configuration	Number of extension modules	Digital module	Calculated based on current consumption	
		Analog module		
		External power supply		12V/16W
EtherCAT	Communication standard	IEC 61158 Type12		
	Physical layer	100BASE-TX		
	Transmission speed	100Mbps (100Base-TX)		
	Duplex mode	Full duplex		
	Topology	Linear, bus and star-type		
	Transmission medium	Cat.5E twisted pair cables		
	Maximum transmission distance between nodes	100m		
	Max. process data	Input: 5,736 bytes Output: 5,736 bytes (but the max. number of frames of process data is 4)		
	Communication cycle	Mini.1ms		
	CANOpen master	Link layer	CAN2.0A	
Terminal resistor		Built-in 120Ω. Do not support disconnection		
Support baud rate bps		20K,50K,100K,125K,250K,500K,800K和1M		
Transmission medium		Cat.5E twisted pair cables		
Max. communication distance		2500 m (20Kbit/s)		
Maximum number of the slaves		32		
Communication cycle		Mini.1ms		
Serial ports	Physical layer	COM1, COM2	RS485	
		COM3	RS232	
	Terminal resistor	COM1, COM2	Built-in 120Ω, support DIP switch	
	Baud rate bps	4800~115200		
	Max. communication distance	COM1, COM2	500m	
		COM3	15m	
	Maximum number of the slaves	COM1, COM2	32	
	COM3	1		
Transmission medium	Cat.5E twisted pair cables			



> Electrical specifications

Items	Technical specifications			
Dielectric withstand voltage	AC1000V for 1 min, between power terminal and I/O terminal, between external terminal and shell			
Noise resistance	1500Vp-p or more, Noise width 1μs, 50ns (based on noise simulator), comply with (IEC61000-4-2/3/4/6)			
Vibration resistance	Installation	Frequency (Hz)	Acceleration (m/s²)	Single amplitude (mm)
	DIN rail mounting	10-57 57-150	- 4.9	0.035 -
10 times of testing in each direction (X-, Y-, and Z-axis directions) (Total: 80 min, each)				
Insulation resistance	50 MΩ or more using 500 V DC insulation resistance meter (Between all terminals and ground terminal)			
IP protection level	IP20			
Working atmosphere	Max. 50°C, free from excessive dust and corrosive gas			
Working altitude	2000m (80kPa)			
Degree of pollution	2, Normally there is only non-conductive pollution, but temporary conductivity caused by condensation should also be expected			

> Environment specifications

Classifications	Items	Working environment	Transport environment	Storage environment
Environment parameter (IEC60721-3)	Temperature	0~50°C (No freezing)	-40~75°C	-25~75°C
	Humidity	5-95%RH (No condensation)		
	Impact (collision)	Acceleration 150m2, action time 11ms, twice in each direction (X-, Y-, and Z-axis directions)		
	Altitude/Atmosphere	Max.2000m	Max.3000m (>70kPa)	

> Power specifications (PD01)

Items	Power voltage	Voltage fluctuation range	Input power	Undervoltage level	Output voltage	Voltage fluctuation	Output power
Specifications	AC 100~240V	-15%~20%	100W	80V	12V	±5%	60W


> Performance specifications

Items	Specifications		
Programming	Program capacity	16MBytes	
	I-area (%I)	128KBytes	
	Q-area (%Q)	128KBytes	
	M-area (%M)	512KBytes	
	Power-failure retention area	800KBytes	
Configuration	Other variables	Not defined	
	Number of extension modules	Digital module	Calculated based on current consumption
		Analog module	
External power supply		12V/16W	
EtherCAT	Communication standard	IEC 61158 Type12	
	Physical layer	100BASE-TX	
	Transmission speed	100Mbps (100Base-TX)	
	Duplex mode	Full duplex	
	Topology	Linear, bus and star-type	
	Transmission medium	Cat.5E twisted pair cables	
	Maximum transmission distance between nodes	100m	
	Max. process data	Input: 5,736 bytes Output: 5,736 bytes (but the max. number of frames of process data is 4)	
Serial ports	Communication cycle	Mini.1ms	
	Physical layer	COM1, COM2	RS485
		COM3	RS232
	Terminal resistor	COM1, COM2	Built-in 120Ω, support DIP switch
	Baud rate bps	4800~115200	
	Max. communication distance	COM1, COM2	500m
		COM3	15m
	Maximum number of the slaves	COM1, COM2	32
		COM3	1
	Transmission medium	Cat.5E twisted pair cables	

Q-SERIES PAC DIMENSION DRAWING


HCQ0-1□00-D

Unit:mm

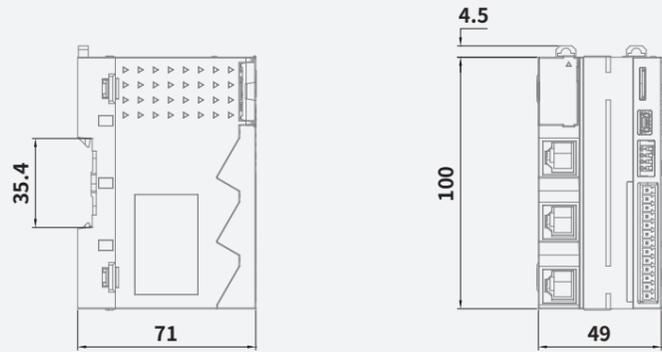


HCQ1-1□00-D

Unit:mm

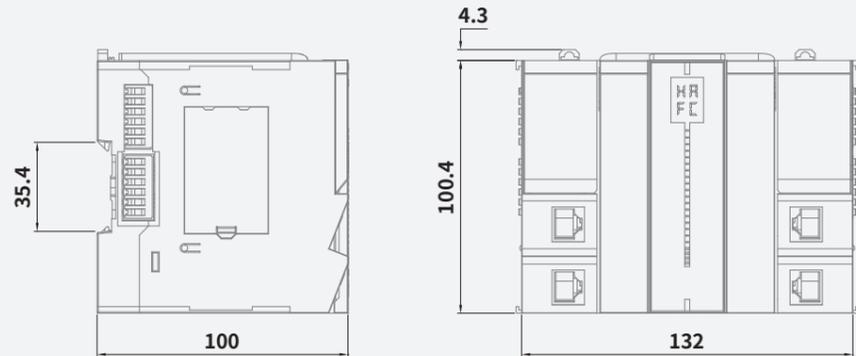

HCQ5-1□00-A

Unit:mm

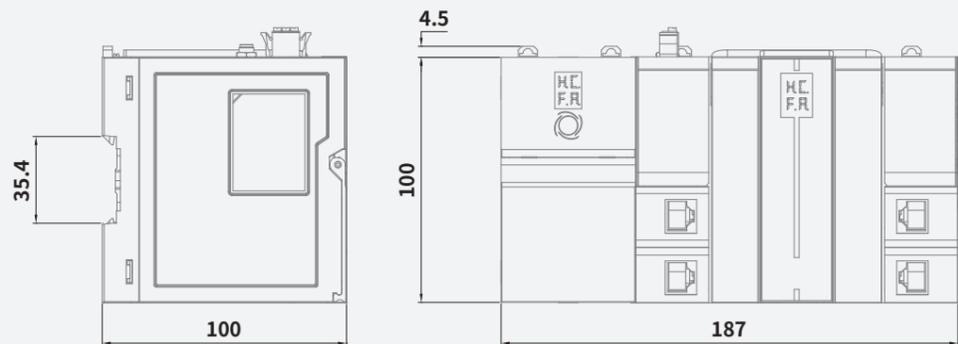

IQ8000-SERIES LINEUP

Q-SERIES PAC EXTERNAL DIMENSIONS

Naming rule for IQ8000 series

HC-IQ8560-1050-D

Product name

HC HC: HCFA controller

Series name

IQ8 IQ8: Industrial PC: 8000 series

Processor

5 5: X86-J1900
6: X86-8145
7: X86-I3
8: X86-I5
9: X86-I7

Storage specifications

6 5: 2G+64G
6: 4G+128G
7: 8G+256G
8: 16G+512G

Display specifications

0 0: No display screen

Operating system

1 1: Linux(Ubuntu)
2: Windows10
3: Windows7
4: QNX

Reserved

0 0: Reserved

Control software module

5 0: CODESYS
1: HCPACS
2: ROBOT
3: CNC
4: MC
5: N/A

Additional function software module

0 0: Standard software
1: Machine vision
2: Edge computing

Power type

D D: DC power
A: AC power



> Main units

Model name	Description
HC-IQ8560-1050-D	2G, 64G SSD, Linux system

> Environment specifications

Items	Specifications
Working temperature	0 ~ 55°C
Storage temperature	-25 ~ 70°C (No condensation)
Relative humidity	10% ~ 95% (No condensation)
Working altitude	2km or less
Electromagnetic interference	EFT 2KV (Power cable, signal cable)
Vibration	5~8.4Hz, amplitude 3.5mm, 8.4~150Hz, Acceleration 9.8m/s ² , scan at a rate of one multiplication frequency per minute, ten times in each direction (X-, Y-, and Z-axis directions).
Impact (collision)	147m/s ² , three times in each direction (X-, Y-, and Z-axis directions)
Pollution level	Pollution degree 2
Protection level	IP20
Cooling method	Forced air cooling
Installation method	Screw-fixed installation

> Power specifications

Items	Specifications
Input voltage	DC 24V±20%
Allowable instantaneous power-failure time	Depend on the UPS
Power consumption	48W Max.

> Performance Specifications

Items		Specifications	
Host system	CPU	CPU type	J1900
		No. of cores/threads	4 cores/4 threads
		Main/Turbo frequency	2GHz/2.42 GHz
	Buffer	2 MB L2	
Memory	Internal memory	2G DDR3L	
	Window OS	Window7-32bit Window7-64bit	
Operating system	Linux OS	Ubuntu16.04 64bit	
	Storage device	Hard disk	mSATA×1 64GB
SSD		miniSD×1	
Interfaces	SD-card storage		miniSD×1
	USB	Type A	USB2.0 A-type×2, USB3.0 A-type×2
	LAN		100/1000M×4
	CAN		Isolated CAN 2.0 (not supported now)
	Serial ports		Isolated RS232×1, RS485×2
	VGA		VGA DSUB15×1
	HDMI		HDMI×1
	I/O		DI×3, DO×2
	Power buttons		Power buttons with light×1
	Power interfaces		DC 24V/2A
Extension interfaces	PCIe extension	Gen2x1 ×1, motion control module can be extended	
	IOT extension	2G/4G/5G	

> Input specifications

Items	Specifications	
Input points	2points	
Input form	NPN/PNP	
Input voltage	DC 24V±10%	
Input impedance	4.3kΩ	
Input current	5.3mA/DC24V	
Input sensitivity current	ON-current	2.13mA or more
	OFF-current	1.8mA or less
Input response frequency	5kHz	
Input signal form	NPN/PNP open-collector transistor	
Circuit isolation	Optocoupler isolation	
Input operation display	N/A	

> Output Specifications

Items		Specifications
Output points		2points
Output type		Transistor/NPN
External voltage		DC 5~30V
Max. load	Resistive load	0.5A/1 point
	Inductive load	12W/DC 24V
Open-circuit leakage current		0.1mA or less/DC 30V
Turn-on voltage drop		1.5V or less
Response tiem	OFF→ON	0.2ms or less/200mA or more(at 24V DC)
	ON→OFF	0.2ms or less/200mA or more(at 24V DC)
Circuit isolation		Optocoupler isolation
Output operation display		N/A

> Ethernet specifications

Items	Specifications
Interface type	RJ45 connector
Data transmission speed	100/1000Mbps
Communication mode	Full duplex/Half duplex
Interfaces	RJ45 connector
Max. transmission distance between stations	100m
Supported protocol	Self-defined
Transmission medium	Cat.5E twisted pair cables

> RS485 specifications


Items	Specifications
Interface type	RS485
Data transmission speed	Max.115200bps
Communication mode	Half duplex
Max. transmission distance	100m (At a specific baud rate)
Supported protocol	Self-defined
Isolation status	Digital isolation
Terminal resistor	Not built-in

> RS232 specifications

Items	Specifications
Interface type	RS232
Data transmission speed	Max.115200bps
Communication mode	Half duplex
Max. transmission distance	5m
Supported protocol	Self-defined
Isolation status	Digital isolation

HC-IQ8560-1050-D

Unit:mm

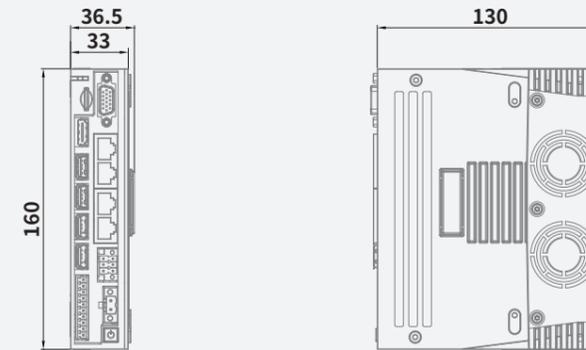

Control topology

Q-series PAC

IQ8000-series IPC

Q-series I/O

Distributed I/O

A-series PLC

R-series PLC

A-series I/O

Product list

Control topology

Q-series PAC

IQ8000-series IPC

Q-series I/O

Distributed I/O

A-series PLC

R-series PLC

A-series I/O

Product list

Modular Compact Easy-to-use

Digital module

High-density compact design, up to 16 I/O points on the module with a thickness of only 12mm

Analog module

Support a variety of voltage and current input and output

Temperature measurement module

Support a variety of thermocouples, thermal resistance etc., and can get the temperature data through the host controller easily

High-speed pulse I/O module

Support encoder input and high-speed pulse output, up to 200kHz pulse I/O



Coupler module

- Support EtherCAT input/output

Coupler module

- Support EtherCAT input/output

Digital input module

- 16/32-point digital input module

Digital output module

- 16/32-point digital output module

Digital I/O module

- 8-point input/8-point output
- 16-point input/16-point output

Analog input module

- 4-ch analog input
- Voltage input: 0~10V, -10~10V, -5~5V, 0~5V, 1~5V
- Current input: 0~20mA, 4~20mA

Analog output module

- 4-ch analog input
- Voltage input: 0~10V, -10~10V, -5~5V, 0~5V, 1~5V
- Current input: 0~20mA, 4~20mA

Temperature measurement module

- Support thermocouple: K, J, E, T, N, B, R, S (Default: K-type)
- Support thermal resistance: PT100, PT1000, Ni100, Ni1000 (Default: PT100) three-wire system

High-speed counter

- 4-ch high-speed counter (encoder) module, input signal supports pulse + direction, up to 200kHz

Pulse output Step drive module

- 20-50V DC single-axis, support PP/PV/CSP and other motor control modules

Terminal module

Note: The -D2 models are the upgraded version of the corresponding -D, and there is no difference in their functions. It is recommended to purchase the D2 models.

HCQX-SERIES UNIT LINEUP

Naming rule for HCQX-series extension modules

HCQX-ID16-D2

Product name

HC HC: HCFA controller

Series name

QX QX: Q-series modules

Function modules

ID EC: Coupler DA: Analog output
 ID: Digital input PD: Power extension
 OD: Digital output TS: Temperature measurement
 MD: Digital I/O HC: High-speed counter
 AD: Analog input

Number of channels

16 16: Number of channels

Power type

D D: DC power
 A: AC power

Product iteration serial number

2

HCQX-ST1505-D2

Product name

HC HC: HCFA controller

Series name

QX QX: Q-series modules

Function modules

ST ST: Step drive

Number of channels

1 1: Single-axis
 2: Two-axis

Working voltage

5 5: 50V (×10)

Peak current

05 05: 5A

Power type

D D: DC power
 A: AC power

Product iteration serial number

2

Coupler module

Models	Output power	Max. distance between stations	Max. number of local extension modules	External dimension WxDxH(mm)
 HCQX-EC01-D	16W	100m*	16	49x71.2x100
 HCQX-EC02-D	16W	100m*	16	49x71.2x100

Power module

Models	Output power	Max. distance between stations	Max. number of local extension modules	External dimension WxDxH(mm)
 HCQX-PD01-A	AC100~240V 50/60Hz	12V 60W	5 years, Based on working 20 hours a day at an ambient temperature of 30°C	50x100x100

Digital input module

Models	Number of channels	Input/output type			External dimension WxDxH(mm)
		Input	Output		
 HCQX-ID16-D2	16	16	DC24V (NPN/PNP)	-	15.2x71.2x100
 HCQX-ID16-D	16	16	DC24V (NPN/PNP)	-	14.7x100x100
 HCQX-ID32-D2	32	32	DC24V (NPN/PNP)	-	28.2x71.2x100

*The transmission medium between the two stations is Ethernet cable;

Digital output module

Models	Number of channels	Input/output type				External dimension WxDxH(mm)
		Input		Output		
 HCQX-OD16-D2*	16	-	-	16	NPN	15.2x71.2x100
 HCQX-OD16-D	16	-	-	16	NPN	14.7x100x100
 HCQX-OD32-D2*	32	-	-	32	NPN	28.2x71.2x100

Digital I/O module

Models	Number of channels	Input/output type				External dimension WxDxH(mm)
		Input		Output		
 HCQX-MD16-D2*	16	8	DC 24V (NPN/PNP)	8	NPN	15.2x71.2x100
 HCQX-MD16-D	16	8	DC 24V (NPN/PNP)	8	NPN	14.7x100x100
 HCQX-MD32-D2*	32	16	DC 24V (NPN/PNP)	16	NPN	28.2x71.2x100

Analog input module

Models	Number of channels	Input type		Channel data update time	External dimension WxDxH(mm)
		Voltage	Current		
 HCQX-AD04-D	4	0~10V -10~10V -5~5V 0~5V 1~5V	0~20mA 4~20mA	1ms	14.7x100x100

Analog output module

Models	Number of channel	Output type		Channel data update time	External dimension WxDxH(mm)
		Voltage	Current		
 HCQX-DA04-D	4	0~10V -10~10V -5~5V 0~5V 1~5V	0~20mA 4~20mA	1ms	14.7x100x100

Temperature measurement module

Models	Number of channels	Corresponding sensor	Input type		External dimension WxDxH(mm)
			Items	Input temperature*	
 HCQX-TS04-D	4	Thermocouple: K, J, E, T, N, B, R, S (Default: K-type) Thermal resistance: PT100, PT1000, Ni100, Ni1000(Default: PT100) 3-wire	Input range	-200~1370°C	14.7x100x100
			Resolution	<±0.3%(For full scale)	
			Input range	-200~850°C	
			Resolution	<±0.5°C	

High-speed counter module

Models	Number of channel	Pulse input method	Max. response frequency (A/B-phase)	External dimension WxDxH(mm)
 HCQX-HC04-D2	4	Phase difference pulse(x1/2/4), Pulse + direction input, up/down pulse input	Single-phase 200kHz	15.2x71.2x100

Step drive module

Models	Number of channel	Motor control mode	Max. output current	Input voltage	External dimension WxDxH(mm)
 HCQX-ST1505-D2	Single-axis	PP, PV, CSP, Homing	Max.5A (peak current)	20/50V	15.2x71.2x100

End unit

Models	Functions	External dimension WxDxH(mm)
 End unit	Attached to the end of the CPU units or extension modules	1x90x100

*PNP output needs to be customized, the model name is: HCQX-□□□□, If needed, please contact HCFA sales or distributors.

*The specific temperature range may vary depending on the sensor type.

General Specifications for HCQX-series Extension Modules

Electrical specifications

Items	Specifications	
Insulation voltage	Electrostatic	AC 500V60s
Insulation resistance	Electrostatic	1MΩ
EMC requirements	Discharge	Contact ±4kV, air ±8kV
	EFT	±2kV
	Surge	DC500V

Environment specifications

Items	Specifications
Working temperature	0~55°C
Storage temperature	-25~75°C
Relative humidity	95%no condensation
Altitude	2km or less
Atmosphere	108kPa~66kPa
Noise resistance	±2kV 5~100kHz
Sinusoidal vibration	9Hz<f<100Hz, 1.0 acceleration, constant amplitude
Drop	1m, 10 times, for packaging transportation

Power specification for IO special modules

Items	Specifications
Rated power for control end	DC 12V
Input voltage range	DC 10.8~13.2V
Max. current consumption	100mA/12V
Rated power for signal end	DC 24V
Input voltage range	DC 20.4~28.8V

Coupler/power/terminal modules
HCQX SERIES

ETHERCAT COUPLER



HCQX-EC01-D
EtherCAT
Fast Ethernet

ETHERCAT COUPLER



HCQX-EC02-D
EtherCAT
Fast Ethernet
Support SLOT nodes

AC POWER



HCQX-PD01-A
AC 110V~220V

END UNIT



HCQX-END
Attached to the end of the modules

Coupler module— Performance specifications

Items	Specifications	
	HCQX-EC01-D	HCQX-EC02-D
Models	Connect the terminal module and the 100BASE-TX EtherCAT network	Connect terminal module and 100BASE-TX EtherCAT network, support SLOT node
Functions	Up to 16	Up to 16
Number of local extension	EtherNet/EtherCAT (Cat.5E twisted pair cables at least) Shielded	EtherNet/EtherCAT (Cat.5E twisted pair cables at least) Shielded
Data transmission medium	Ethernet transmission, max.100m	Ethernet transmission, max.100m
Distance between station	EtherCAT/100Mbaud	EtherCAT/100Mbaud
Transmission protocol / transmission rate	about 1μs	About 1μs
Delay	2 × RJ45	2 × RJ45
Bus interface	DC 24V (-15%~+20%)	DC 24V (-15%~+20%)
Power supply	70mA+ (Σ QBUS current/4)	70mA+ (Σ QBUS current/4)
Current consumption	Max.1750mA (21W) (-25°C~+55°C) Max.1333mA (16W) (>+55°C)	Max.1750mA (21W) (-25°C~+55°C) Max.1333mA (16W) (>+55°C)
QBUS Load power	Isolated power supply	Isolated power supply
Electrical isolation		

AC power module - Power specifications

Items	Specifications
Models	HCQX-PD01-A
Input voltage	AC 100~240V 50/60Hz
Output voltage	12V
Load power	60W

DIGITAL INPUT



HCQX-ID16-D2
16-point digital input
Support NPN/PNP input



HCQX-ID16-D
16-point digital input
Support NPN/PNP input



HCQX-ID32-D2
32-point digital input
Support NPN/PNP input

DIGITAL OUTPUT



HCQX-OD16-D2*
16-point digital output
Support NPN output



HCQX-OD16-D
16-point digital output
Support NPN output



HCQX-OD32-D2*
32-point digital output
Support NPN output

DIGITAL IN/OUT



HCQX-MD16-D2*
16-point digital I/O
Support NPN/PNP input
Support NPN output



HCQX-MD16-D
16-point digital I/O
Support NPN/PNP input
Support NPN output



HCQX-MD32-D2*
32-point digital I/O
Support NPN/PNP input
Support NPN output

*PNP output needs to be customized, the model name is: HCQX-□□□□, If needed, please contact HCFA sales or distributors.

Digital input modules — Performance Specifications

Items	Specifications	
Models	HCQX-ID16-D / HCQX-ID16-D2	HCQX-ID32-D2
Input points	16	32
Input form	NPN/PNP	NPN/PNP
Input voltage range	DC 24V (+20%~-15%)	DC 24V (+20%~-15%)
Input signal current	7mA / DC 24V	7mA / DC 24V
Input resistance	4.86kΩ	4.86kΩ
Input sensitivity ON-current	5.35mA or more	5.35mA or more
Input sensitivity OFF-current	2.1mA or less	2.1mA or less
Input voltage threshold	VIH_Min:15V VIL_Max:5V	VIH_Min:15V VIL_Max:5V
Input frequency response	5kHz	5kHz
Input response time	0.1ms or less	0.1ms or less
Pulse shape	Pulse width:100us or more Rising/falling edge:50us or less	Pulse width:100us or more Rising/falling edge:50us or less
Wiring method	2-wire, Shared by common terminal	2-wire, Shared by common terminal
Common method	Every 8 points share a common terminal	Every 8 points share a common terminal
Isolation voltage level	1.5kVrms	1.5kVrms

Digital output modules — Performance Specifications

Items	Specifications	
Models	HCQX-OD16-D / HCQX-OD16-D2	HCQX-OD32-D2
Output points	16	32
External power range	DC 5V~30V	DC 5V~30V
Output form	The standard models support NPN; PNP needs to be customized	The standard models support NPN; PNP needs to be customized
Max. load current	0.25A/point 2A/8point	0.25A/point 2A/8point
Voltage drop at power-ON	1V or less	1V以下
Leakage current at -OFF	0.1mA/DC 24V	0.1mA/DC 24V
Output response	5kHz	5kHz
Output response time	0.1ms point	0.1ms or less
Wiring method	2-wire, Shared by common terminal	2-wire, Shared by common terminal
Common method	Every 8 points share a common terminal	Every 8 points share a common terminal
Isolation voltage level	1.5kVrms	1.5kVrms

Digital I/O module — Performance Specifications

Items	Specifications	
Models	HCQX-MD16-D / HCQX-MD16-D2	HCQX-MD32-D2
I/O points	8, 8	16, 16
Input form	NPN/PNP	NPN/PNP
Output form	The standard models support NPN; PNP needs to be customized	The standard models support NPN; PNP needs to be customized
Input voltage range	DC 24V (+20%~-15%)	DC 24V (+20%~-15%)
Input signal current	7mA / DC 24V	7mA / DC 24V
Input resistance	4.86kΩ	4.86kΩ
Input sensitivity ON-current	5.35mA or more	5.35mA or more
Input sensitivity OFF-current	2.1mA or less	2.1mA or less
Input voltage threshold	VIH_Min:15V VIL_Max:5V	VIH_Min:15V VIL_Max:5V
Input frequency response	5kHz	5kHz
Input response time	0.1ms or less	0.1ms or less
Input pulse waveform	Pulse width:100us or more Rising/falling edge:50us or less	Pulse width:100us or more Rising/falling edge:50us or less
External power range	DC 5V~30V	DC 5V~30V
Max. load current	0.25A/point 2A/8point	0.25A/point 2A/8point
Voltage drop at power-ON	1V or less	1V or less
Leakage current at power-OFF	0.1mA/DC 24V	0.1mA/DC 24V
Output response frequency	5kHz	5kHz
Output response time	0.1ms or less	0.1ms or less
Wiring method	2-wire, Shared by common terminal	2-wire, Shared by common terminal
Common method	Every 8 points share a common terminal	Every 8 points share a common terminal
Isolation voltage level	1.5kVrms	1.5kVrms

ANALOG INPUT



HCQX-AD04-D

4-ch analog input

Input voltage range: 0~10V, -10~10V, -5~5V, 0~5V, 1~5V

Differential/
single-ended input

Input current range: 0~20mA, 4~20mA

ANALOG OUTPUT



HCQX-DA04-D

4-ch analog output

Input voltage range: 0~10V, -10~10V, -5~5V, 0~5V, 1~5V

Single-ended output

Input current range: 0~20mA, 4~20mA

TEMPERATURE MEASUREMENT



HCQX-TS04-D

4-ch temperature measurement

Thermocouple type: K, J, E, T, N, B, R, S

Thermal resistance: PT100, PT1000, Ni100, Ni1000

Analog input module — Performance Specifications

Items	Specifications
Models	HCQX-AD04-D
Analog current consumption	Type: 80mA
Voltage sampling input	0~10V, -10~10V, -5~5V, 0~5V, 1~5V
Max. voltage input	-50V~+50V
Current sampling input	0~20mA, 4~20mA
Max. current sampling input	-50mA~+50mA
Voltage input type	Differential input/single-ended input
Current input type	Single-ended input
Sampling rate	4ksps
Accuracy	±0.3%FSR(Full scale range)
Voltage channel temperature drift	±7uV/°C (0.003%FSR)
Current channel temperature drift	±3nA/°C

Analog output module — Performance Specifications

Items	Specifications
Models	HCQX-DA04-D
Analog current consumption	Type: 160mA
Voltage conversion output	0~10V, -10~10V, -5~5V, 0~5V, 1~5V
Current conversion output	0~20mA, 4~20mA
Voltage output type	Single-ended output
Current output type	Single-ended output
Conversion rate	4ksps
Accuracy	±0.3%FSR
Voltage channel temperature drift	±0.03%FSR
Current channel temperature drift	±0.05%FSR
Voltage output load	Min: 1kΩ
Current output load	Max: 0.625 kΩ

Temperature measurement module — Performance Specifications

Items	Specifications
Models	HCQX-TS04-D
Signal voltage	Thermocouple: K, J, E, T, N, B, R, S (Default K-type) Thermal resistance: PT100, PT1000, Ni100, Ni1000 (Default PT100) 3-wire system
Settings	No need to set the address in the software, codesys will make the configuration automatically; Functions include overrun detection / disconnection detection / sampling cycle setting / sensor-type setting / Input filter setting and temperature unit conversion setting Typical 1Khz; Depends on sensor-type, conversion time and length
Input filter limit frequency	Typical 1Khz; Depends on sensor type, conversion time and length
Resolution	0.1 °C per digit , 0.1°F per digit
Warm-up time during TC test	30 mins
Absolute max. ratings	±150mV
Conversion time	About 100ms~1.3s, according to the configuration and filter settings and provide disconnection detection. (Turned on by default) and takes 460ms. TC time: 100ms* number of open channels*filtering times of this channel PT time: 200ms* number of open channels*filtering times of this channel
Temperature range	Determined by the corresponding sensor type; For TC, default setting K: -200~1370 °C, -7~55mV; For PT, default setting PT100: -200~850°C, 18~391Ω.
Measurement error (total error range)	TC: <±0.3% (For full scale) PT: <±0.5°C

○ HIGH SPEED COUNTER

○ STEP DRIVER



- HCQX-HC04-D2
- 4-ch high-speed counting
- Single-ended input
- Single-phase / dual-phase pulse input



- HCQX-ST1505-D2
- Single-axis control
- Supported mode: PP PV CSP HM

High-speed counter module — Line drive specifications

Items	specifications
Models	HCQX-HC04-D2
Collector input	DC 24V/8.4mA
ON-voltage/ON-current	DC 15V or more/5mA or more
Single-phase max. response frequency (A/B-phase)	200kHz
ON/OFF response time	Less than 2μs

High-speed counter module — Input specifications

Items	specifications
Models	HCQX-HC04-D2
Number of channel	4
Number of input points per channel	4
Rated input voltage	DC 24V (DC 20.4~28.8V)
Input resistance	3kΩ
Input type	NPN /PNP
Wiring method	Three-wire encoder
Pulse input method	Orthogonal phase pulse(x2/4)/Pulse + direction/Up/down pulse
Counting unit	Pulse
Counting range	- 2,147,483,648~2,147,483,647

High-speed counter module — Counting functions

Items	specifications
Models	HCQX-HC04-D2
Counter type	Ring counter or linear counter
Counter control	Gate control, counter reset and counter preset
Lock function	1 external input lock and 1 internal lock
Measurement method	Pulse rate measurement and pulse period measurement

Step drive module — Power Specifications

Items	Specifications
Models	HCQX-ST1505-D2
QBUS rated voltage	DC 12V
QBUS current consumption	Type: 100mA (without encoder) Max: 300mA (with encoder)
Input voltage range	DC 20~50V
Max. input current	5A

Step drive module — Control Specifications

Items	Specifications
Models	HCQX-ST1505-D2
Control protocol	CiA402
Communication scan cycle	250μs, 500μs, 1ms, 2ms, 4ms, 8ms
Subdivision level	32~256 step
Power supply to the encoder	4.5~5V, 200mA (Max)
Encoder input type	Differential input
Encoder max. response frequency	200kHz
Motor control mode	PP, PV, CSP, Homing
Digital input	I0~I4, single-ended DC 24V, max. pulse frequency 5kHz
Digital output	Q0~Q1, open-drain collector, max. 30V/250mA, max. pulse frequency 2kHz
Motor parameters	The motor parameters can be detected by servo drive automatically


Step drive module — Drive Specifications

Items	Specifications
Models	HCQX-ST1505-D2
Power output type	Dual H-bridge
Current control	PWM frequency 25kHz
Output current	Continuous max. peak current 5A
Protection functions	Overcurrent protection, undervoltage protection, overvoltage protection, over-temperature protection

HCQX-SERIES UNIT DIMENSION DRAWING

Coupler modules


Unit:mm

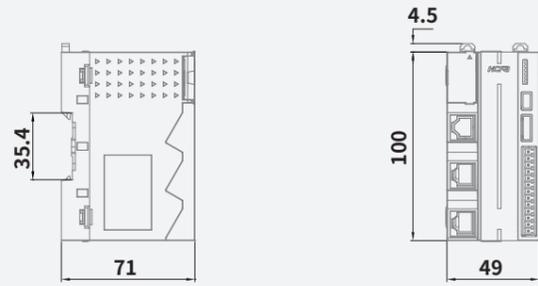

Model	
HCQX-EC01-D	HCQX-EC02-D

Power modules


Unit:mm

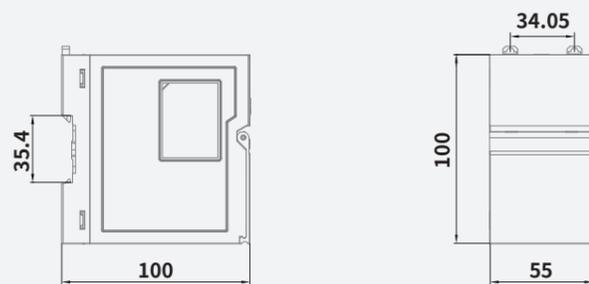

Model	
HCQX-PD01-A	


Extension modules

Unit:mm

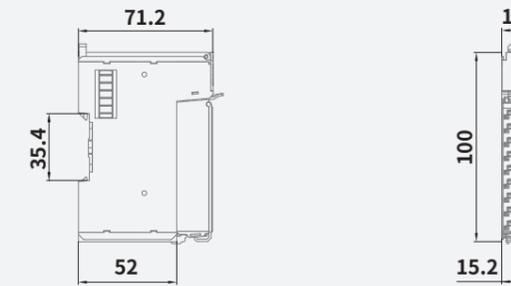


Model			
HCQX-ID16-D2	HCQX-OD16-D2	HCQX-MD16-D2	HCQX-HC04-D2

Unit:mm

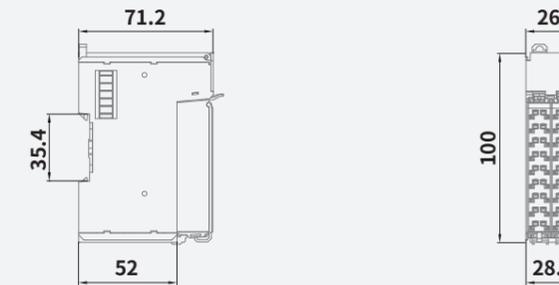

Model			
HCQX-ID32-D2	HCQX-OD32-D2	HCQX-MD32-D2	HCQX-ST1505-D2

Unit:mm

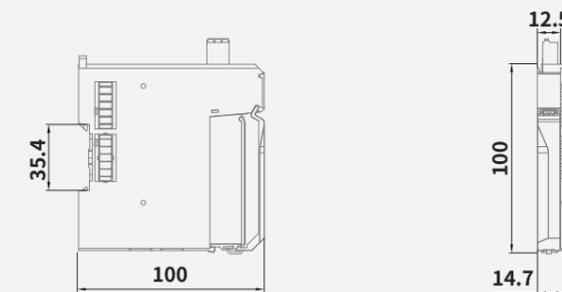

Model			
HCQX-ID16-D	HCQX-OD16-D	HCQX-MD16-D	HCQX-AD04-D
HCQX-DA04-D	HCQX-TS04-D		

Control topology

Q-series PAC

IQ8000-series IPC

Q-series I/O

Distributed I/O

A-series PLC

R-series PLC

A-series I/O

Product list

Control topology

Q-series PAC

IQ8000-series IPC

Q-series I/O

Distributed I/O

A-series PLC

R-series PLC

A-series I/O

Product list

Q SERIES DISTRIBUTED I/O SYSTEM

Transparent protective cover design

Increases the dust-proof ability of the module, so that it can be easily competent in dusty environments.

Provide solutions for discrete control sites

Distributed design, supports EtherCAT protocol, and can be flexibly arranged in the industrial field. Up to 32 I/O points can be supported on a single module.

The module supports 24VDC input power supply, no additional power supply module needed, and 24VDC 0V port is provided for easy wiring.

HCNxE-SERIES UNIT LINEUP

Naming rule for HCNxE-series extension modules

HCNxE-ID32-D

Product name

HC HC: HCFA controller

Distributed modules

NXE NXE: EtherCAT module
 NXP: ProfiNet module
 NXM: Modbus TCP module
 NXC: CANOpen module

Function modules

ID ID: Digital input
 OD: Digital output
 MD: Digital I/O

Number of channels

32 32: Number of channels
Note: For digital I/O, represented by 4-digit, for example: 2408, indicating 24 input points and 8 output points

Power type

D D: DC power
 A: AC power

Distributed digital input modules

Models	Number of channel	Input/output type			External dimension WxDxH(mm)
		Input	Output		
 HCNxE-ID32-D	32	32	DC 24V (NPN/PNP)	-	160x28x50

Distributed digital output modules

Models	Number of channel	Input/output type			External dimension WxDxH(mm)
		Input	Output		
 HCNxE-OD32-D	32	-	-	32 NPN	160x28x50

Distributed digital I/O modules

Models	Number of channel	Input/output type			External dimension WxDxH(mm)
		Input	Output		
 HCNxE-MD1616-D	32	16	DC 24V (NPN/PNP)	16 NPN	160x28x50
 HCNxE-MD2408-D	32	24	DC 24V (NPN/PNP)	8 NPN	160x28x50

Environment specifications

Items	Specifications																		
Ambient temperature	For operation: 0~55°C (32~131°F) For storage: -25~75°C (-13~167°F)																		
Relative humidity	For operation: 5~95%RH (No condensation)																		
Vibration resistance	<table border="1"> <thead> <tr> <th>Installation</th> <th>Frequency (Hz)</th> <th>Frequency (m/s²)</th> <th>Half amplitude (mm)</th> </tr> </thead> <tbody> <tr> <td rowspan="2">When installed on DIN rail</td> <td>10-57</td> <td>-</td> <td>0.035</td> </tr> <tr> <td>57-150</td> <td>4.9</td> <td>-</td> </tr> <tr> <td rowspan="2">When installed directly</td> <td>10-57</td> <td>-</td> <td>0.075</td> </tr> <tr> <td>57-150</td> <td>9.8</td> <td>-</td> </tr> </tbody> </table>	Installation	Frequency (Hz)	Frequency (m/s ²)	Half amplitude (mm)	When installed on DIN rail	10-57	-	0.035	57-150	4.9	-	When installed directly	10-57	-	0.075	57-150	9.8	-
	Installation	Frequency (Hz)	Frequency (m/s ²)	Half amplitude (mm)															
	When installed on DIN rail	10-57	-	0.035															
		57-150	4.9	-															
When installed directly	10-57	-	0.075																
	57-150	9.8	-																
10 times of testing in each direction (X-, Y-, and Z-axis directions) (Total: 80 min, each)																			
Shock resistance	147m/s ² , Action time: 11ms, 3 times by half-sine pulse in each direction X, Y, and Z																		
Noise resistance	By noise simulator at noise voltage of 10,000Vp-p, noise width of 1μs, rise time of 1ns and period of 30 to 100Hz																		
Dielectric withstand voltage	AC 500V one minute																		
Insulation resistance	5MΩ or more by 500V DC megger																		
Grounding	Class D grounding (grounding resistance: 100Ω or less) <Common grounding with a heavy electrical system is not allowed.																		
Working atmosphere	Free from corrosive or flammable gas and excessive conductive dusts																		
Working altitude	2000m or less																		

Power specifications

Items	Rated power of control side	Input voltage range of control side	Max. current consumption of control side	Rated power of IO side	Input voltage range of IO side	Max. current of IO side
Specifications	DC 24V	DC 20.4~28.8V	50mA/24V	DC 24V	DC 20.4~28.8V	5A

Control topology
 Q-series PAC
 IQ8000-series IPC
 Q-series I/O
 Distributed I/O
 A-series PLC
 R-series PLC
 A-series I/O
 Product list

Control topology
 Q-series PAC
 IQ8000-series IPC
 Q-series I/O
 Distributed I/O
 A-series PLC
 R-series PLC
 A-series I/O
 Product list

REMOTE DIGITAL INPUT



- HCNxE-ID32-D
- 32-point digital input
- Support NPN/PNP input

REMOTE DIGITAL OUTPUT



- HCNxE-OD32-D
- 32-point digital output
- Support NPN output

REMOTE DIGITAL IN/OUT



- HCNxE-MD1616-D
- 32-point digital I/O
- Support NPN/PNP input
- Support NPN output



- HCNxE-MD2408-D
- 32-point digital I/O
- Support NPN/PNP input
- Support NPN output

Digital input module

Items	Specifications
Models	HCNxE-ID32-D
Input points	32
Rated input voltage	DC 24V (DC 20.4~28.8V)
Rated input current	8.4mA/24V
ON-voltage/ON-current	DC 15V or more/5mA or more
ON/OFF response time	125μs or more
Input resistance	3kΩ
Input type	Compatible with NPN and PNP (switched by the Switch)
Wiring method	2-wire sensor, 3-wire sensor

Digital output module

Items	Specifications
Models	HCNxE-OD32-D
Output points	32
Rated load voltage	DC 24V (DC 20.4~28.8V)
Rated load current	0.5A/ch, 2A/8ch
Leakage current at power-OFF	0.1mA or less
Residual voltage at power-ON	0.3V or less
ON/OFF response time	125μs or more
Output type	NPN, built-in common terminal
Wiring method	2-wire
Protection functions	Overcurrent protection, overvoltage protection, over-temperature protection

Digital I/O module

Items	Specifications	
	HCNxE-MD1616-D	HCNxE-MD2408-D
Models	HCNxE-MD1616-D	HCNxE-MD2408-D
Input points	16	24
Output points	16	8
Rated input voltage	DC 24V (DC 20.4~28.8V)	DC 24V (DC 20.4~28.8V)
Rated input current	8.4mA/24V	8.4mA/24V
ON-voltage/ON-current	DC 15V or more/5mA or more	DC 15V or more/5mA or more
ON/OFF response time	125μs or more	125μs or more
Input resistance	3kΩ	3kΩ
Input type	Compatible with NPN and PNP (switched by the Switch)	Compatible with NPN and PNP (switched by the Switch)
Wiring method	2-wire sensor, 3-wire sensor	2-wire sensor, 3-wire sensor
Rated load voltage	DC 24V (DC 20.4~28.8V)	DC 24V (DC 20.4~28.8V)
Rated load current	0.5A/ch, 2A/8ch	0.5A/ch, 2A/8ch
Leakage current at power-OFF	0.1mA or less	0.1mA or less
Residual voltage at power-ON	0.3V or less	0.3V or less
Output type	NPN, built-in common terminal	NPN, built-in common terminal
Wiring method	2-wire	2-wire
Protection functions	Overcurrent protection, overvoltage protection, over-temperature protection	Overcurrent protection, overvoltage protection, over-temperature protection

