


Water Proof Tape

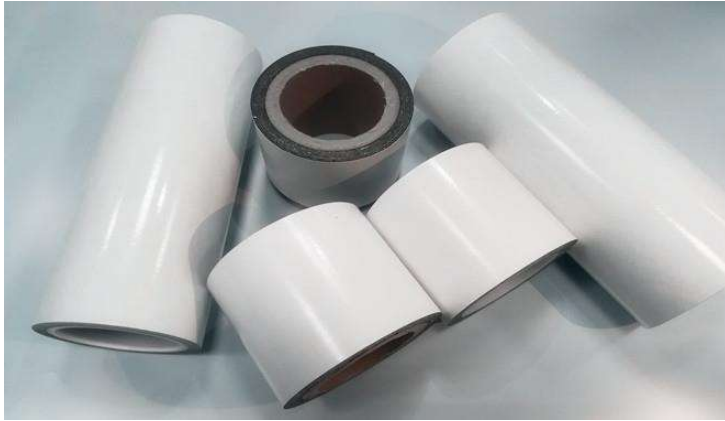

Introduction

防水胶带 ST-WTS01

Waterproof Tape ST-IMS01

1.产品概要 Product profile

- 优秀的粘合性 Excellent adhesive
- 优秀的冲击吸收效果 Excellent shock-absorbing effect
- 优秀的防水效果 Excellent waterproof effect
- 优秀的抗热性 Excellent heat-resistance
- 厚度轻薄 The thin thickness

2.产品结构 Product structure

压克力胶黏剂 Acrylic adhesive
丙烯酸泡沫层 Acrylic foam layer
压克力胶黏剂 Acrylic adhesive
离型层 (PET) Release liner

3.典型物性表 Typical specification

试验项目 Test item	测试方法 Test method	基准值 Value
厚度 Thickness	ASTM D 3652	200±10%um
颜色 Color	视觉 Vision	黑色 Black
180° 剥离强度 Peeling strength	ASTM D3330	SUS:Min.1000gf/25mm
Waterproof 防水		

4.适用范围 Applications

- 电视机 TV
- 显示屏 Display
- 笔记本电脑 Computers
- 手机等...Mobile phone



5.包装事项 Packing

- 规格 Size 50-1000mm*200m
- 储存条件 Storage condition
- 室温 Room temp: 20^25℃
- 相对湿度 Relative humidity: 60±10%

注：产品结构、材料组合、厚度规格可按客户要求定制。

Note:Product structure ,material composition,thickness and specifications can be customized according to customer requirements.

防水胶带 ST-WTS02

Waterproof Tape ST-IMS02

1.产品概要 Product profile

- 优秀的粘合性 Excellent adhesive
- 优秀的冲击吸收效果 Excellent shock-absorbing effect
- 优秀的防水效果 Excellent waterproof effect
- 优秀的抗热性 Excellent heat-resistance
- 厚度轻薄 The thin thickness

2.产品结构 Product structure

黑色压克力胶黏剂 Black acrylic adhesive
缓冲层 Cushion layer
PET 基材 Substrate Layer
黑色压克力胶黏剂 Black acrylic adhesive
离型纸 Paper release liner layer

3.典型物性表 Typical specification

试验项目 Test item	测试方法 Test method	基准值 Value
厚度 Thickness	ASTM D3652	300±10%
颜色 Color	视觉 Vision	黑色 Black
180° 剥离强度 Peeling strength	ASTM D3330	SUS:Min. 2000gf/25mm
Waterproof 防水		

4.适用范围 Applications

- 电视机 TV
- 显示屏 Display
- 笔记本电脑 Computers
- 手机等...Mobile phone



5.包装事项 Packing

- 规格 Size 50-1000mm*200m
- 储存条件 Storage condition
- 室温 Room temp: 20~25℃
- 相对湿度 Relative humidity: 60±10%

注：产品结构、材料组合、厚度规格可按客户要求定制。

Note:Product structure ,material composition,thickness and specifications can be customized according to customer requirements.